


// SILO Ø 2,50/2CD60 - 10,60 tons



FILE 2.46

VERSION 3. 23/6/2026

COD. CD250G60M2

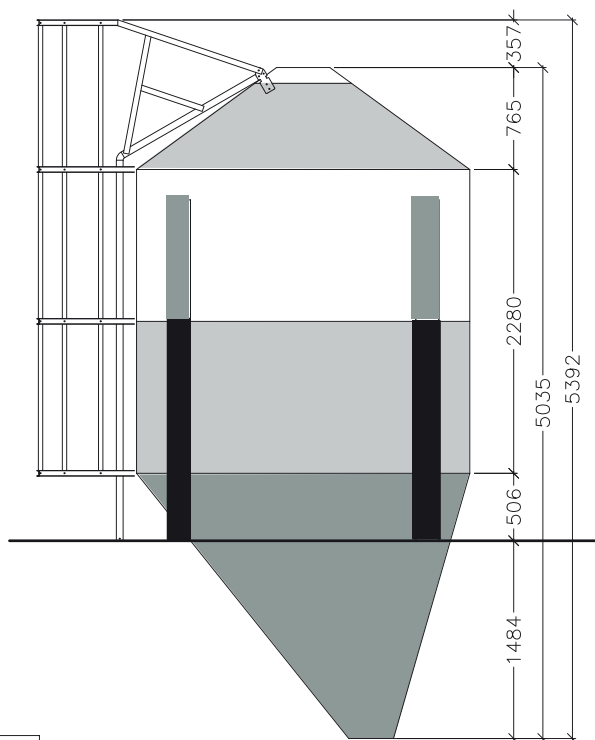

THICKNESSES	
	0.80 mm
	1.00 mm
	1.50 mm
	2.00 mm
	3.00 mm

PARTS AND MATERIALS

- 1 ROOF**
 - Composed by roof sectors assembled between them through screws.
 - Sectors material : Galvanised steel S450GD Z600.
- 2 CYLINDER**
 - Composed by bodysheets screwed between them and with stiffeners.
 - Bodysheet material: Galvanised steel S450GD Z600.
- 3 HOPPER**
 - Hopper sectors screwed between them to form the hopper.
 - Material: Galvanised steel S450 GD Z600

Model	Ø		Nº Rings	Angle of hopper	Nº legs				Height to fill		Total height with safety cage	
	m	feet				m³	feet³	tons*	m	feet	m	feet
G01TA250G60M2	2,50	8	2	60	4	16,30	575,55	10,60				

*Capacity in tons is calculated at 0,65 tons/m3, for free flowing material.

Products not considered as free flowing materials not to be stored in these silos (soybean meal, cotton seed meal, hot feeds). Consult Growket technical department when is doubt about specific material.