


# // SILO Ø 2,50/1CD60 - 6,80 tons



FILE 2.45  
VERSION 2. 30/09/2024

COD. CD250G60M1

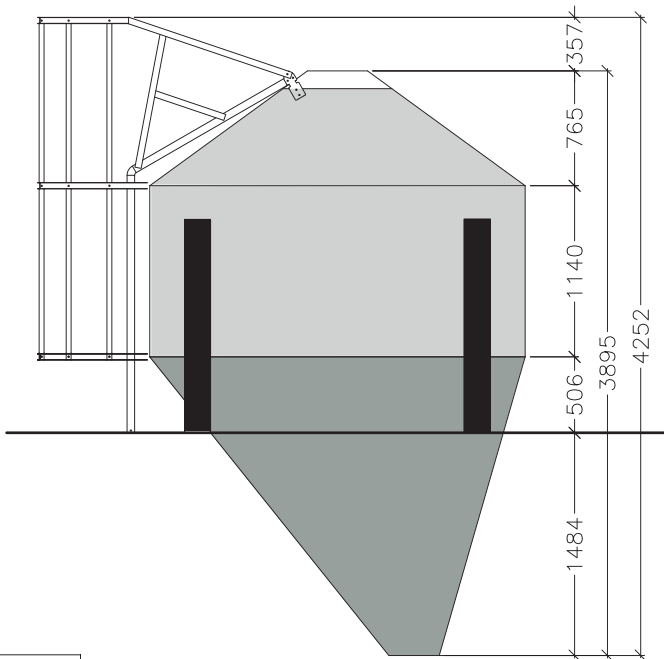

THICKNESSES	
□	0.80 mm
■	1.00 mm
■	1.50 mm
■	2.00 mm
■	3.00 mm

## PARTS AND MATERIALS

- 1 **ROOF**
  - Composed by roof sectors assembled between them through screws.
  - Sectors material : Galvanised steel S350GD Z600.
- 2 **CYLINDER**
  - Composed by bodysheets screwed between them and with stiffeners.
  - Bodysheet material: Galvanised steel S350GD Z600.
- 3 **HOPPER**
  - Hopper sectors screwed between them to form the hopper.
  - Material: Galvanised steel S350 GD Z600 MAC

Model	Ø		N° Rings	α Angle of hopper	N° legs				Height to fill		Total height with safety cage	
	m	feet				m³	feet³	tons*	m	feet	m	feet
G01TA250G60M1	2,50	8	1	60	4	10,50	370,76	6,80				

\*Capacity in tons is calculated at 0,65 tons/m3, for free flowing material.

Products not considered as free flowing materials not to be stored in these silos (soybean meal, cotton seed meal, hot feeds). Consult Growket technical department when is doubt about specific material.