


ACCESS
DOOR

COMPONENTS
CYLINDER



FILE 4.3
VERSION 2. 15/06/2021

COD.ASGPUERTACIL
ASPUERV01

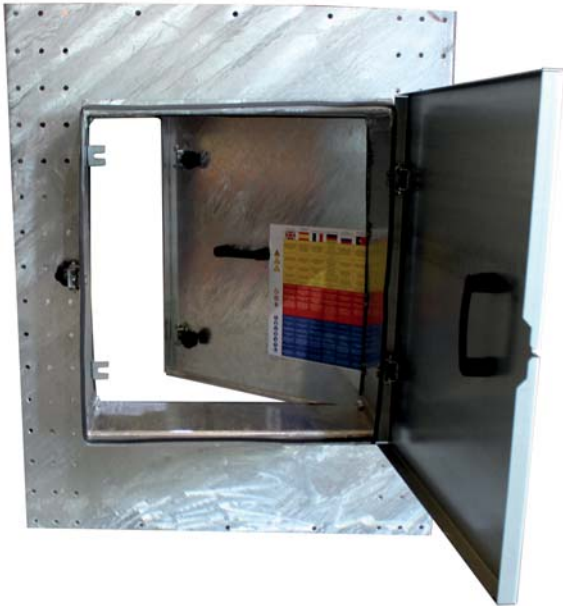

TECHNICAL SPECIFICATIONS

Rectangular access door to go into the silo (1).

It's composed by an inner sheet and an outer sheet screwed over hinge. Both have a closure system with FOAM (10x3mm) to ensure the sealing.

It's install over a special bodysheet with hole (2) located on the second ring, close to the screw auger exit.
Easy to install and it's and standard accessory.

PARTS AND MATERIALS

- 1** ACCESS DOOR
- Composed for 2 sheets, outside and insade, screwed to a frame
 - Dimensions: 630x700 mm and 530x700 mm, according to the n° stiffeners/ ring
 - Material: steel S275JR galvanised HDG

- 2** SPECIAL BODYSHEET WITH HOLE
- Size: 2400 x 1140 mm
 - Material: galvanised steel S450GD Z600

