

LADDER
TO ROOF

ACCESSORIES
STAIRS



FILE 5.14
VERSION 2. 14/06/2021

COD. ASBH**ESC
ASCE**ESC****T**




TECHNICAL SPECIFICATIONS

Vertical ladder from the ground floor to the eave, with intermediate platforms and safety bands according to the rule UNE-EN ISO 14222 – 1/2/3/4.

Platform located according the rule:

- Height < 10 m Without platforms
- Height > 10 m Platforms each 6 m

The first part of the ladder on silo's bottom doesn't have safety band (between 2.2 – 3 m, according the rule).

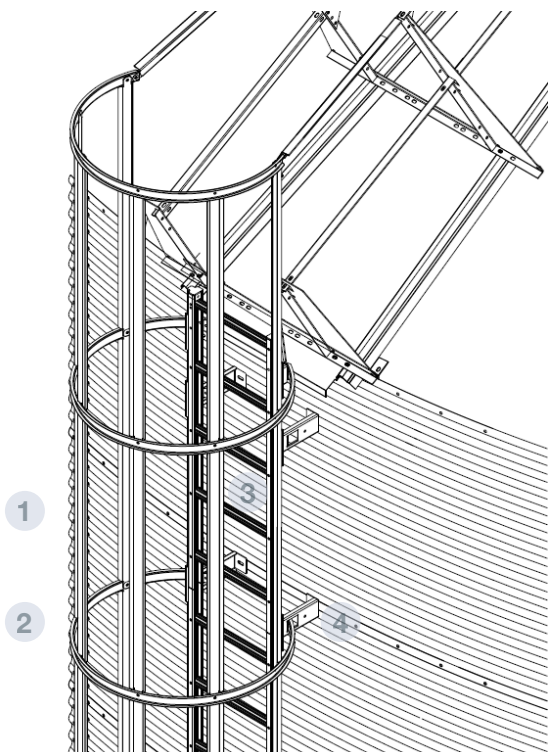

PARTS AND MATERIALS

- 1 RAIL**
 - 6 rails each 1140 mm
 - Material: galvanised steel S 280 GD Z 600 e= 1.5 mm
- 2 SAFETY BAND**
 - 1 each 1140 mm
 - Material: galvanised steel S 280 GD Z 600 e= 2 mm
- 3 RUNG**
 - Each 285 mm
 - Length: 458 mm
 - Material: galvanised steel S 280 GD Z 600 e= 1.5 mm
- 4 LADDER SUPPORT**
 - To join the ladder to the bodysheet
 - Material: galvanised steel S 280 GD Z 600 e= 3 mm
- 5 PLATFORM**
 - Dimensions: 1100x800 mm
 - Sheet with holes or Tramex structure
 - Material: galvanised steel S 280 GD Z 600 e= 3 mm