


ROOF INSPECTION DOOR

COMPONENT



FILE 4.2
VERSION 3. 12/03/2026

COD. ASPUERTAT

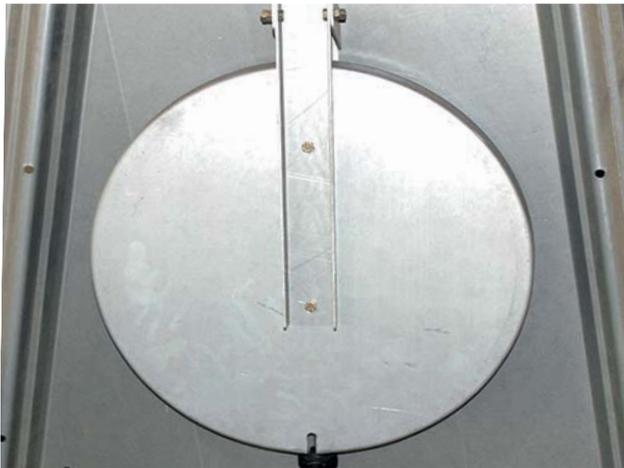

TECHNICAL SPECIFICATIONS

Circular door (Ø 400) to watch the grain onto the silo.
It has a pressure closure to fix the door.

One unit is included in each silo. Should additional units be required, they must be requested separately.

It's installed over special roof sectors. They have a hole (Ø420) and a fold on the edge to improve the sealing.

This roof sectors are the same that are used to the roof aeration.

PARTS AND MATERIALS

- 1 U PROFILE
 - "U" profile 60x50x430 of cold rolled steel
 - MATERIAL: galvanised steel S 280 GD Z 600 MAC
- 2 COVER
 - Circular plate (Ø515) and 60mm thickness
 - MATERIAL: galvanised steel S 280 GD Z 600 MAC e=60mm
- 3 "U" HINGE
 - To join "U" profile and the roof sector
 - MATERIAL: galvanised steel S 280 GD Z 600 MAC
- 4 WEATHER STRIP
 - To seal the closure
 - MATERIAL: rubber
- 5 RING
 - Close frame of the door
 - MATERIAL: galvanised steel S 280 GD Z 600 MAC
- 6 CLOSURE PRESSURE HINGE
 - Close system of the door with M8 x 35

