


CMR-1135-2T-3HP

ACCESSORIES  
AERATION  
SYSTEM



FILES 5.39  
VERSION 2. 17/06/2021

COD. 30CMR11352

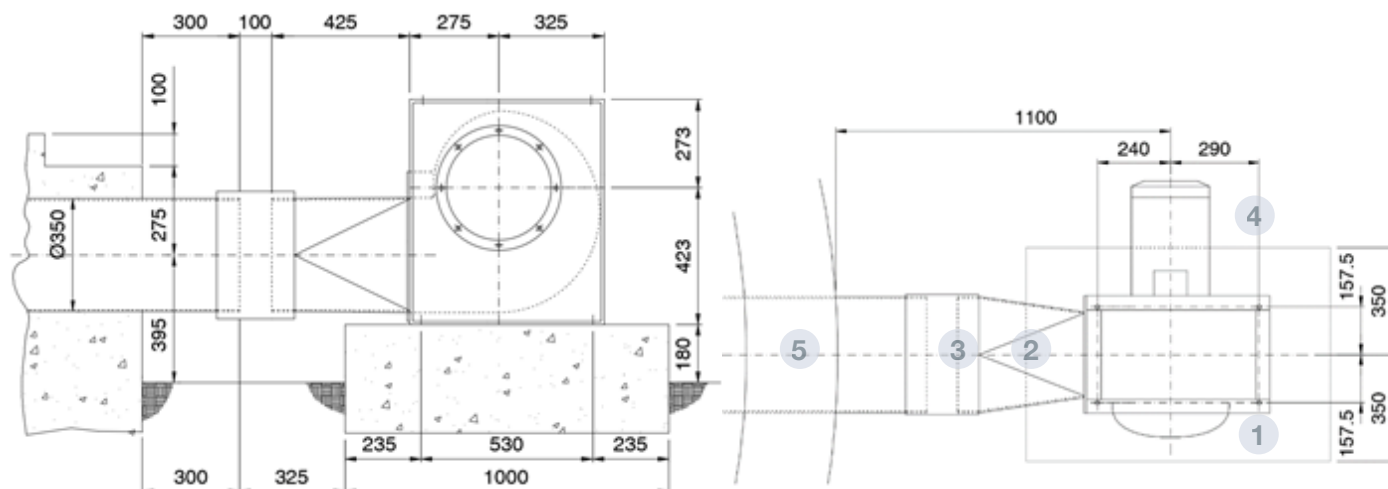

DESCRIPTION

Medium pressure centrifugal fan and single aspiration, big strength, equipped with a turbine.

Anticorrosive finishing process with polymeric polyester resins (190 °C).

Previously, degreasing nanotechnologist treatment free of phosphates.

Placed at the base of the silo, outside, either connected to the aeration channels, a ventilated cone or a full perforated floor. When the aeration is for a hopper silo, the fan is directly screwed to a hopper sector prepared for it.

TECHNICAL SPECIFICATIONS		MOTOR DATA SHEET	
Performance	57,8%	Nominal Power (kW)	2,20
Performance grade N	64,2	Hz/phases	50/3
Measurement category	A	Motor (rpm)	2885
Efficiency category	Estático	Poles	2
Specific rete	1,01	Max. Current (A) 230 V	7,32
Flow rate (m³/h)	4249	Max. Current. (A) 400 V	4,21
Pressure (mmca)	122,18	Motor protection	IP55
Electric power (kW)	2,45	Motor chassis size	90
Speed (rpm)	2892	Motor efficiency	IE3
Speed variator	VSD not	Limit air temperatures	-20 °C →
		Max. Flow rate (m³/h)	7800
		Speed (rpm)	2910
		Approx. weight. (kg)	59
• Established data in max. Efficiency point.		• Data may change. Please check motor	

PARTS

- 1 FAN
- 2 TRANSITION
- 3 FLEXIBLE CONNECTION
- 4 FAN INLET
- 5 FOUNDATION TUBE (NOT SUPPLIED BY SYMAGA)

