


CMR-1445-2T-10HP

ACCESSORIES
AERATION
SYSTEM



FILES 5.41
VERSION 1
COD. 30CMR14452
14/10/2019

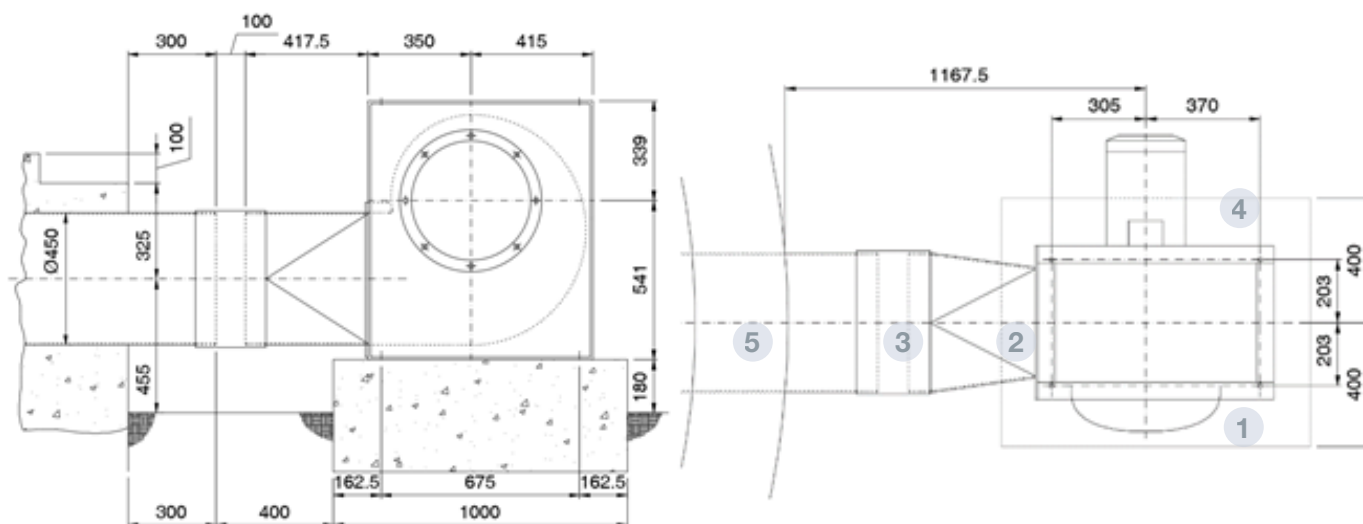

DESCRIPTION

Medium pressure centrifugal fan and single aspiration, big strength, equipped with a turbine.
Anticorrosive finishing process with polymeric polyester resins (190 °C).
Previously, degreasing nanotechnologist treatment free of phosphates.

TECHNICAL SPECIFICATIONS		MOTOR DATA SHEET	
Performance	63,4%	Nominal Power (kW)	7,50
Performance grade N	64,5	Hz/phases	50/3
Measurement category	A	Motor (rpm)	2870
Efficiency category	Estático	Poles	2
Specific rete	1,02	Max. Current (A) 230 V	14,10,00
Flow rate (m ³ /h)	8951	Max. Current. (A) 400 V	8,17
Pressure (mmca)	206,50	Motor protection	IP55
Electric power (kW)	7,94	Motor chassis size	132
Speed (rpm)	2879	Motor efficiency	IE3
Speed variator	VSD not	Limit air temperatures	-20 °C →
		Max. Flow rate (m ³ /h)	16500
		Speed (rpm)	2930
		Approx. weight. (kg)	122
• Established data in max. Efficiency point.		• Data may change. Please check motor	

PARTS

- 1 FAN
- 2 TRANSITION
- 3 FLEXIBLE CONNECTION
- 4 FAN INLET
- 5 FOUNDATION TUBE (NOT SUPPLIED BY SYMAGA)

