

Eave catwalk. Interior & exterior  
Accessories. Roof.

EXTERIOR EAVE  
CATWALK

ROOF



FICHA 5.11  
VERSIÓN 2. 14/06/2021


COD AS\*\*\*\*PASALE2  
AS\*\*\*\*PASALE3



## TECHNICAL SPECIFICATIONS

Walkway on the eave.

To work on maintenance tasks.

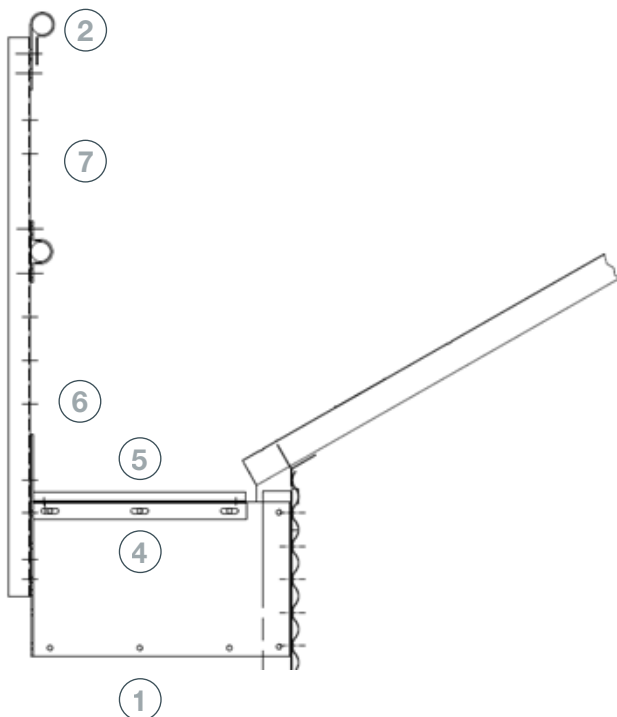

## PARTS AND MATERIALS

- 1 CLIP FOR HANRAIL BRACKET**
  - Connection between the handrail bracket and the stiffener to support the floor
  - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 2 HANRAIL BRACKET**
  - "U" profile 60x50x1280 mm of cold rolled steel to support the tubular handrails
  - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 3 CLIPS**
  - Folded sheet to join the handrail to the handrail brackets
  - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 4 FLOOR SUPPORT ANGLE**
  - "L" profile 40x40x494 mm of cold rolled steel
  - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 5 FLOOR**
  - Sheet with holes or TrameX fixed over the floor support angle
  - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 6 FOOT PROTECTION EAVE CATWALK**
  - "L" profile 155x100x860 mm located on the platform's edge
  - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 7 TUBULAR HANDRAIL**
  - Pipe Ø48 mm fixed to the handrail brackets
  - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm


INTERIOR EAVE  
CATWALK

ROOF



FILE 5.12  
VERSION 2. 31/08/2021


COD AS\*\*\*\*PASALE2  
AS\*\*\*\*PASALE3

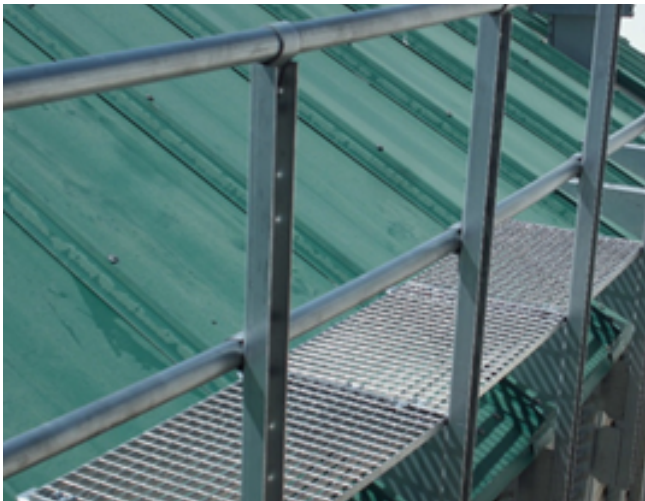

## TECHNICAL SPECIFICATIONS

Walkway on the eave.

To work on maintenance tasks.

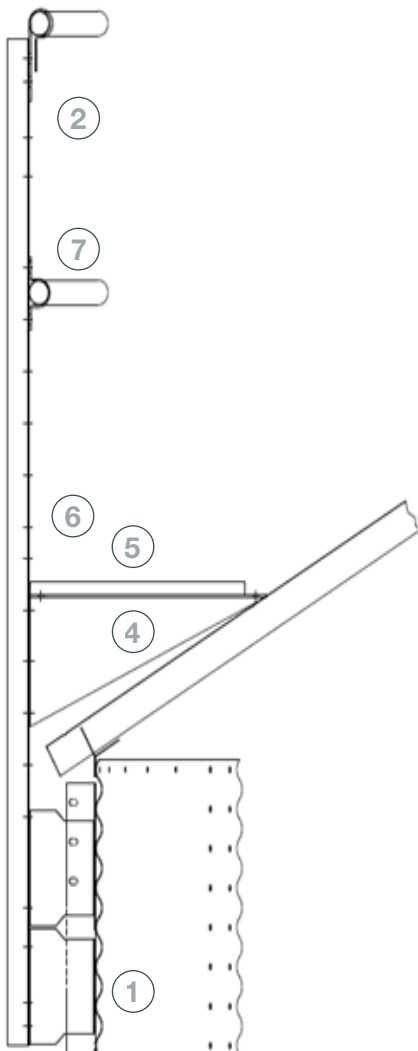

## PARTS AND MATERIALS

- 1 CLIP FOR HANRAIL BRACKET**
  - Connection between the handrail bracket and the stiffener to support the floor
  - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 2 HANRAIL BRACKET**
  - "U" profile 60x50x1280 mm of cold rolled steel to support the tubular handrails
  - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 3 CLIPS**
  - Folded sheet to join the handrail to the handrail brackets
  - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 4 HOLDING ANGLE**
  - Folded sheet 550x250 mm to support the floor
  - MATERIAL: galvanised steel S280 GD Z600 MAC e= 3mm
- 5 FLOOR**
  - Sheet with holes or TrameX fixed over the floor support angle
  - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 6 FOOT PROTECTION EAVE CATWALK**
  - Folded sheet 120x2474x1.5 mm located on the edge of the floor
  - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm
- 7 TUBULAR HANDRAIL**
  - Pipe Ø48 mm fixed to the handrail brackets
  - MATERIAL: Galvanised steel S280 GD Z600 MAC e= 3mm



**Offices and Factory:**

Ctra. de Arenas km. 2.300  
13210 Villarta de San Juan • Ciudad Real - Spain  
T: +34 926 6294

**Madrid Office:**

C/Azcona, 37 • 28028 Madrid - Spain T:  
+34 91 726 43 04

[symaga@symaga.com](mailto:symaga@symaga.com)  
[www.symaga.com](http://www.symaga.com)