

ACCESSORIES STAIRS



FILE 1.5 VERSION 1. 21/10/2024

> COD. ASBH**ESC ASCE**ESC****T**




TECHNICAL SPECIFICATIONS

Vertical ladder from the ground floor to the eave, with intermediate platforms and safety bands according to the rule UNE-EN ISO 14222 – 1/2/3/4.

Platform located according the rule:

 $\begin{array}{lll} \cdot \mbox{Height} \ < \ 10 \ \mbox{m} & \mbox{Without platforms} \\ \cdot \mbox{Height} \ > \ 10 \ \mbox{m} & \mbox{Platforms each 6 m} \end{array}$

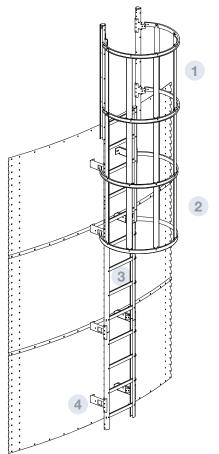

PARTS AND MATERIALS

- (1) RA
 - · 6 rails each 1140 mm
 - · Material: galvanised steel S 280 GD Z 600 e= 1.5 mm
- 2 SAFETY BANK
 - · 1 each 1140 mm
 - · Material: galvanised steel S 280 GD Z 600 e= 2 mm
- (3) RUN
 - · Each 285 mm
 - · Length: 458 mm
 - · Material: galvanised steel S 280 GD Z 600 e= 1.5 mm
- LADDER SUPPOR
 - · To join the ladder to the bodysheet
 - · Material: galvanised steel S 280 GD Z 600 e= 3 mm
- 5 PLATFOR
 - · Dimensions: 1100x800 mm
 - $\cdot \, \text{Sheet with holes or Tramex structure} \\$
 - \cdot Material: galvanised steel S 280 GD Z 600 e= 3 mm