


DOUBLE  
BODYSHEET  
ACCESS DOOR

ACCESSORIES  
CYLINDER



FILE 4.6  
VERSION 4. 09/04/2026

COD. ASPUERV\*\*

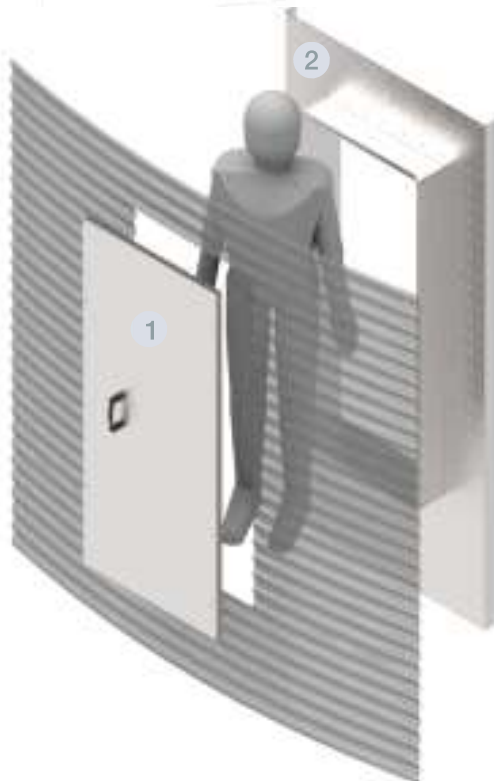

## TECHNICAL SPECIFICATIONS

Rectangular door to access the silo (1).

The compatibility of this door with different silos is subject to technical evaluation based on the specific characteristics of each project.

It is made up of 3 inner sheets and an outer one screwed onto a hinged frame. Both have a FOAM closing system (10x3mm) to guarantee their watertightness. The closing system has been improved with wing nuts that adjust the sheets to the frame.

The frame is screwed to the silo bodysheet.

It is easy to install and comes as an optional silo accessory.

## PARTS AND MATERIALS

- 1 ACCESS DOOR
  - Formed by two sheets, exterior and interior, bolted to a frame
  - DIMENSIONS\*: Available in two sizes:
    - 1520 × 635 mm: for standard-load silos.
    - 1330 × 505 mm: for heavy load silos.
  - MATERIALS: S275JR HDG galvanized steel
- 2 SHEET METAL FRAME
  - Material: S275JR HDG galvanised steel

### \*Notes:

- Please confirm with Symaga which of the two options will be included in the order.
- The two sizes are available because the smaller version (1330 × 505 mm) is reinforced and can withstand heavier loads.